
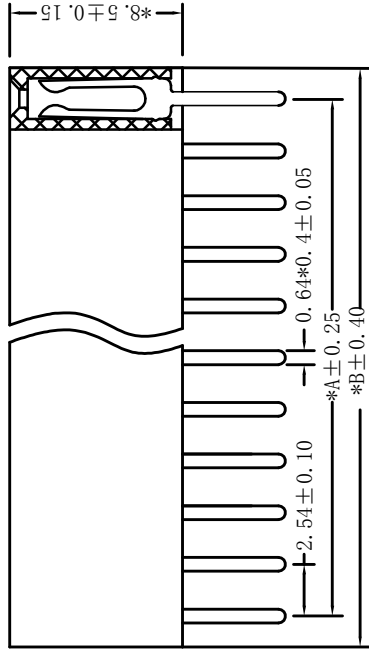


**MATERIAL (材质)**

- Insulator (塑胶) : PBT+30%G.F.(UL94V-0)
- Color (颜色) : Black
- Contact (接触件) : Brass
- Contact Plating (电镀) : 1.0u" Au over 50u" Nickel
- Plating (镀色) : Gold-Plated

**SPECIFICATION (特性)**

- Current Rate (额定电流) : 3Amp
- Operation Temperature (工作温度) : -40°C to +105°C
- Contact Resistance (接触电阻) : 20mΩ MAX.at DC 1A
- Insulation Resistance (绝缘) : 1000MΩ MIN.at DC 500V
- Dielectirc Strength (耐压) : AC 500V Per minute

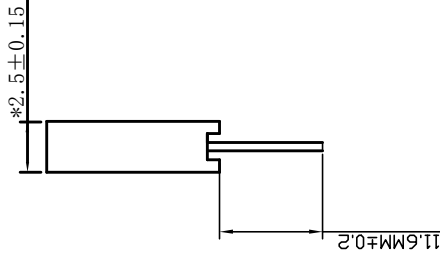

PCB LAYOUT

PIN Number	Dimension (mm)		PIN Number	Dimension (mm)	
	A	B		A	B
.....	.....	.....	1*21P	50.80	53.84
1*2P	2.54	5.58	1*22P	53.34	56.38
1*3P	5.08	8.12	1*23P	55.88	58.92
1*4P	7.62	10.66	1*24P	58.42	61.46
1*5P	10.16	13.20	1*25P	60.96	64.00
1*6P	12.70	15.74	1*26P	63.50	66.54
1*7P	15.24	18.28	1*27P	66.04	69.08
1*8P	17.78	20.86	1*28P	68.58	71.62
1*9P	20.32	23.36	1*29P	71.12	74.16
1*10P	22.86	25.90	1*30P	73.66	76.70
1*11P	25.40	28.44	1*31P	76.20	79.24
1*12P	27.94	30.98	1*32P	78.74	81.78
1*13P	30.48	33.52	1*33P	81.28	84.32
1*14P	33.02	36.06	1*34P	83.82	86.86
1*15P	35.56	38.60	1*35P	86.36	89.40
1*16P	38.10	41.14	1*36P	88.90	91.94
1*17P	40.64	43.68	1*37P	91.44	94.48
1*18P	43.18	46.22	1*38P	93.98	97.02
1*19P	45.72	48.76	1*39P	96.52	99.56
1*20P	48.26	51.30	1*40P	99.06	102.10

HENHADIANZHICUAN

X-1-0.05	X-1-0.16	品名/规格	PH2.54*8.5 1*XXP DC=3.2 180度
X-XX-0.05	X-XX-0.01	图纸编号	F-D-1-F792XX11211HA
X-1-1	X-1-0.05	制图/陈明	审核
UNIT: MM	SCALE: 1:1	版本 B/0	日期 2011-04-18
SIZE: A4			核准